





FA 40 906 50




EN 358 + EN 795 Type B + EN 795 Type C

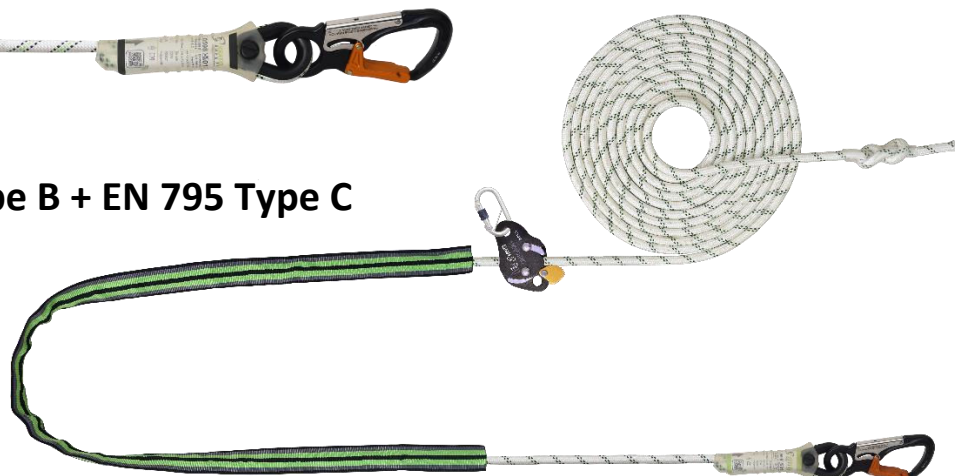


FA 40 906 100 (10 m)

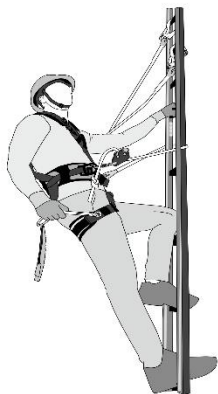

EN 358:2018

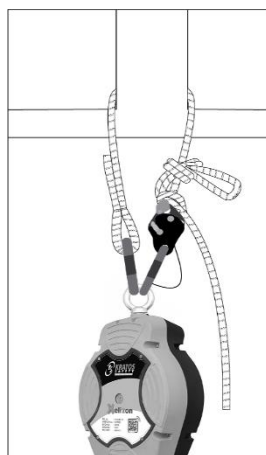



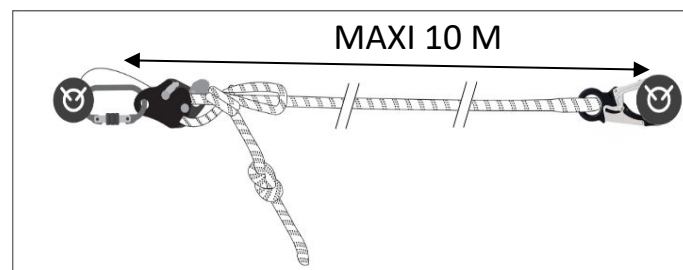

EN 795:2012 Type B





EN 795:2012 Type C



HS CODE
63079098
CARTON SIZE / PCS.
40 x 40 x 24 cm / 12
AET (UE) N°2777_21926-01_E00-00
Satra Technology Europe Ltd., N° 2777, Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland
MODULE D FI14/14003.02
SGS Fimko Oy, N°0598 Takomotie 8, 00380 HELSINKI, Finland

REF.	FA 40 906 50 FA 40 906 100
CE	EN 358:2018, EN 795:2012 Type B & C
LG.	1.6 m / 5.0 m 1.6 m / 10.0 m
MAT.	 PA 12 mm Polyamide
	STEEL / ALU
MAT. 	ALU
	0.75 KG 1.60 KG

MAT.		MAT. 
Matière	Matière connecteurs	Matière boucle de réglage / coulisseau
Material	Material of connectors	Material of adjustment buckle / rope grab
Material	Material de los conectores	Material de hebilla de ajuste / corredera
Materia	Materie conettori	Materia fibbia di regolazione / anticaduta scorrevole
Material	Material der Verbinder	Material der Einstellschnalle/des Gleitelements