








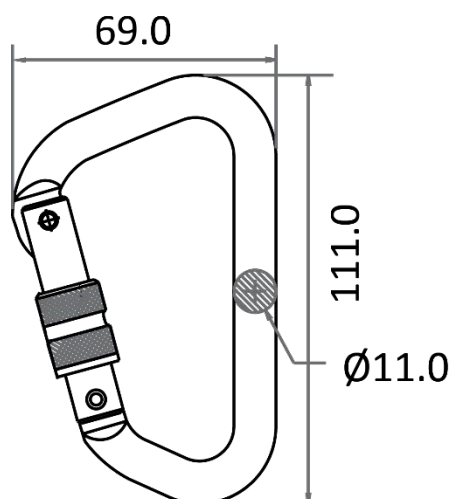

FA 50 103 22



REF.	FA 50 103 22
CE	EN 362:2004 Class B EN 12275 Class B/H
	23 kN / 22.5 mm
MAT.	
	SCREW
KEYLOCK	---
+	UIAA, ATEX Directive 2014/34/EU
	0.08 KG

	MAT.	
Résistance à la rupture / Ouverture Breaking strength / Gate opening	Matière Material	Type d'ouverture Opening system
Resistencia a la ruptura / Apertura Resistenza alla rottura / Apertura	Material Material	Tipo de apertura Sistema di apertura
Bruchfestigkeit / Öffnung	Material	Öffnungssystem

HS CODE
76169990
CARTON SIZE / PCS.
58x38x23 cm / 200
AET N°2777_10353-02_E10-01
Satra Technology Europe Ltd., N° 2777, Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland
MODULE D FI14/14003.02
SGS Fimko Oy, N°0598 Takomotie 8, 00380 HELSINKI, Finland
AET (UKCA) N°AB0321/16065-01/E01-01
Satra Technology Centre, N°0321 Wyndham Way, Telford Way, Kettering Northamptonshire, NN16 8SD, United Kingdom
MODULE D 11 IN14/14003
SGS United Kingdom Ltd., N°0120 Unit 202B, Worle Parkway, Weston-super-Mare, BS22 6WA, United Kingdom