





FA 60 005 XX



FA 60 005 06



FA 60 005 08



FA 60 005 12





FA 60 005 15






FA 60 005 20



FA 60 005 30

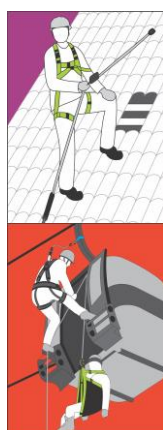

| |
|---|
| HS CODE |
| 63079098 |
| CARTON SIZE / PCS. |
| FA 60 005 06 : 60 x 40 x 24 cm / 100 |
| FA 60 005 08/12/15/20/30 : 40 x 40 x 24 cm / 50 |
| AET (UE) N°2777/10789-01/E01-01 (FA 60 005 08/12/15/30), N°10789-02/E03-01 (FA 60 005 06/20) |
| Satra Technology Europe Ltd., N° 2777, Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland |
| MODULE D FI14/14003.02 |
| SGS Fimko Oy, N°0598 Takomotie 8, 00380 HELSINKI, Finland |
| AET (UKCA) N°AB0321/16017-01/E01-01 |
| Satra Technology Centre, N°0321 Wyndham Way, Telford Way, Kettering Northamptonshire, NN16 8SD, United Kingdom |
| MODULE D 11 IN14/14003 |
| SGS United Kingdom Ltd., N°0120 Unit 202B, Worle Parkway, Weston-super-Mare, BS22 6WA, United Kingdom |

| | |
|---|--|
| REF. | FA 60 005 XX |
| CE | EN 795:2012 Type B EN 566 |
|  | x1 |
| LG. | 0.6 m 0.8 m 1.2 m 1.5 m 2.0 m 3.0 m |
| MAT. |  20 mm PES |
| R (kN) / MBS (kN) | 22 kN / 30 kN |
|  | 0.07 kg 0.09 kg 0.13 kg 0.16 kg 0.21 kg 0.33 kg |



Nombre d'utilisateurs
Number of users
Cantidad de usuarios
Quantità di utilizzatori
Anzahl der Benutzer

R (kN) / MBS (kN)

Résistance statique (en kN) / Résistance à la rupture
Static strength / Minimum Breaking Strength
Resistencia estática (en kN) / Resistencia a la ruptura (en kN)
Resistenza statica (in kN) / Resistenza alla rottura (in kN)
Statische Festigkeit (in kN) / Bruchfestigkeit (in kN)