





FA 60 038 00, FA 60 038 01

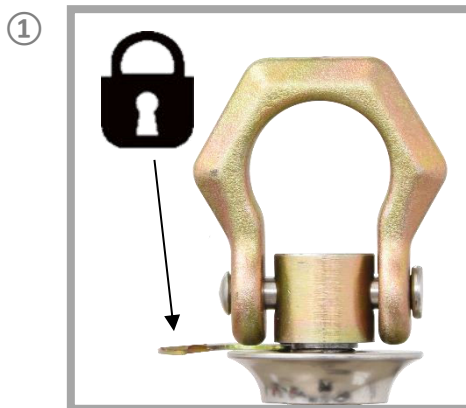


110 mm

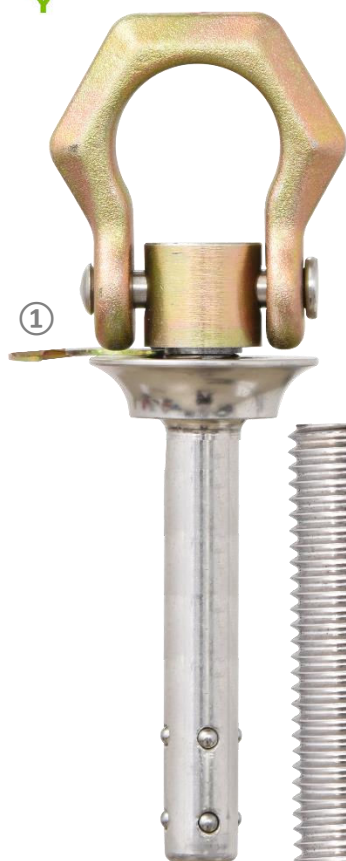





FA 60 038 00

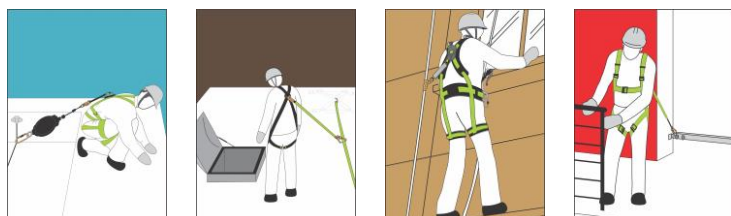

FA 60 038 01



| |
|--|
| HS CODE |
| 83081000 |
| CARTON SIZE / PCS. |
| FA 60 038 00 : 40 x 30 x 14 cm / 50 |
| FA 60 038 01 : 40 x 30 x 14 cm / 30 |
| Certificate of Test n° SPC0249910/1637 Issue 3 |
| Satra Technology Centre, N°0321 Wyndham Way, Telford Way, Kettering Northamptonshire, NN16 8SD, United Kingdom |

| REF. | FA 60 038 00 | FA 60 038 01 |
|---|---|---|
|  | EN 795:2012 Type A | --- |
|  | x1 | x1 |
| MAT. |  |  |
| DIM. | 54 mm / 110 mm | 110 mm |
| R (kN) / MBS (kN) | 12 kN / 23 kN | 12 kN / 23 kN |
|  | CONCRETE Ø 20 mm x 150 mm | CONCRETE Ø 20 mm x 150 mm |
|  | 0.34 KG | 0.49 KG |




Nombre d'utilisateurs
Number of users
Cantidad de usuarios
Quantità di utilizzatori
Anzahl der Benutzer

CONCRETE

Béton
Concrete
Hormigón
Concreto
Beton

R (kN) / MBS (kN)

Résistance statique (en kN) / Résistance à la rupture
Static strength (kN) / Minimum Breaking Strength
Resistencia estática (en kN) / Resistencia a la ruptura (en kN)
Resistenza statica (in kN) / Resistenza alla rottura (in kN)
Statische Festigkeit (in kN) / Bruchfestigkeit (in kN)



Matière de la structure d'accueil / Dimensions de la structure d'accueil
Material of the receiving structure / Dimensions of the receiving structure
Material de la estructura receptora / Dimensiones de la estructura receptora
Materiale della struttura ospitante / Dimensioni della struttura ospitante
Material der Aufnahmestruktur / Abmessungen der Aufnahmestruktur