



FA 30 620 15, FA 30 621 15



FA 30 620 15

①




FA 30 621 15







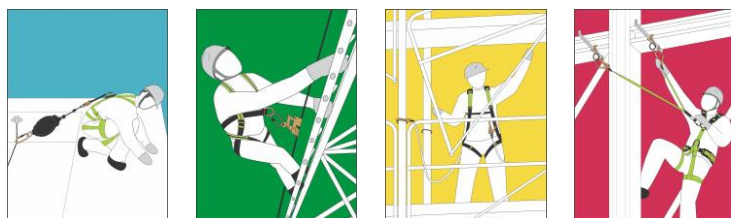

①



①



HS CODE
56090090
CARTON SIZE / PCS.
FA 30 620 15: 80 x 40 x 24 cm / 10 FA 30 621 15: 60 x 40 x 48 cm / 8
AET N°2777/10964-01/E06-01
Satra Technology Europe Ltd., N° 2777, Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland
MODULE D FI14/14003.02
SGS Fimko Oy, N°0598 Takomotie 8, 00380 HELSINKI, Finland
AET (UKCA) N°AB0321/16096-01/E01-01
Satra Technology Centre, N°0321 Wyndham Way, Telford Way, Kettering Northamptonshire, NN16 8SD, United Kingdom
MODULE D 11 IN14/14003
SGS United Kingdom Ltd., N°0120 Unit 202B, Worle Parkway, Weston-super-Mare, BS22 6WA, United Kingdom

REF.	FA 30 620 15	FA 30 621 15
LG.  KG	1.50 m (connectors included)	
CE	EN 355:2002	
MAT.	 PA 11 mm	
	45 mm	
	 FA 50 103 22B (20 mm) / FA 50 208 60 (60 mm)	 FA 50 103 22B (20 mm) / FA 50 208 11 (109 mm)
	NO	
+	PPE-R 11.063	
	1.79 KG	2.60 KG



Largeur de l'absorbeur d'énergie
 Width of the energy absorber
Ancho del absorbedor de energía
 Larghezza del assorbitore di energia
Breite des Falldämpfers

LG.



Longueur Poids maxi utilisateur
Length Max. user weight
Longitud Peso máximo del usuario
Lunghezza Peso Max. dell'utente
Länge Höchstgewicht des Benutzers



Matière connecteurs
 Material of connectors
Material de los conectores
 Materiale connettori
Material der Verbinder



Homologué pour le travail à proximité d'arêtes vives
 Approved for work near sharp edges
Homologado para trabajo cerca de aristas vivas
 Omologato per lavoro in prossimità di spigoli vivi
Zugelassen für Arbeiten in der Nähe scharfer Kanten